



HEAT PUMP INVERTER RANGE

SUMMER POOL FUN, ALL YEAR ROUND


Extend your swimming season and swim all year round

Lower operating costs and noise levels

Reduce heating times and save on running costs

Wireless Wi-Fi control with your smartphone

R32 Refrigerant* - Lower environmental impact

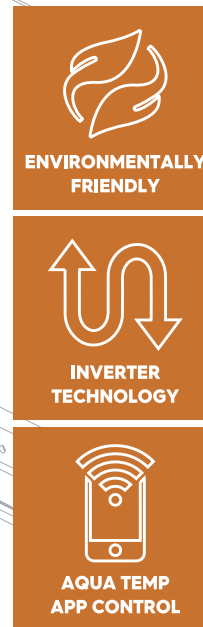

* R32 Refrigerant only available for ECO and Viron range models

WHAT ARE THE BENEFITS OF HEAT PUMPS?

Heat pumps absorb 80% of the heat from the air to heat your pool making it an easy to use and energy efficient heating option.

Heat Pumps allow your pool to stay consistently warm and comfortable to swim in, regardless of the outside weather temperature.

Maximise your pool usage through the year by extending swimming time. In some areas of Australia that can mean all year round!

Astral Pool heat pumps use state of the art technology which means increased efficiency and reduced energy bills while also being environmentally friendly.

Extend your swimming season and swim all year round

Keeps your pool consistently warm





HOW INVERTER TECHNOLOGY MAXIMISES THE BENEFITS OF HEAT PUMPS

INVERTER TECHNOLOGY

AstralPool's range of Inverter technology heat pumps uses up to 15-30% less power consumption when compared to a non-inverter heat pump.

SILENT MODE

The Inverter technology also reduces the noise due to a unique internal ventilation design, the addition of silent mode allows you to operate at anytime without disturbing the neighbours.

TOP DISCHARGE OPTION

With the innovative vertical exhaust design option, the top discharge inverter heat pump can be installed next to virtually any installation in tight spaces.

LCD SCREEN

Easy intuitive control of settings.

WIFI CONTROL

The Viron range and Top Discharge heat pumps come included with WiFi. Also available as an optional add on for all other models.





MAKE SWIMMING A PLEASURE

ENVIRONMENTALLY FRIENDLY

AstralPool Heat Pumps are an environmentally friendly option to heat your pool. Operating on a similar principle to your refrigerator or air conditioner, Heat Pumps use environmentally friendly refrigerant gas that extracts the latent heat from the air and transfers this heat into the pool water.

BUILT FOR AUSTRALIAN ENVIRONMENTS

Unlike many other heat pumps, the corrosion proof titanium heat exchanger is enclosed in a purpose designed and fully injection moulded housing for maximum strength and long life. The fully moulded plastic Heat Pump case is impervious to corrosion and guarantees maximum life regardless of location, "seaside" tropical north or outback.

ENERGY EFFICIENT

For every 1 kW of electricity consumed, AstralPool Heat Pumps will collect up to 13 kW of heat from the atmosphere. Sunshine is not necessary and your Heat Pump will continue to heat your pool in air temperatures as low as 7 degrees. So even if the nights are cold, or the days leading up to the weekend are cool, your AstralPool Heat Pump can heat and maintain your pool water temperature at a comfortable swimming temperature.

QUIET COMPRESSOR

A nearly silent compressor moves the refrigerant gas through a coil (called evaporator) through which air is forced and collects heat from the surrounding atmosphere. The now superheated refrigerant gas then passes through a titanium heat exchanger (called a condenser) which transfers the heat into the pool water and the cycle starts again.

SIZING OPTIONS

AstralPool has a wide selection of heat pumps to suit virtually any size swimming pool, from small residential pools to large public pools. When choosing your heat pump, AstralPool recommend you assess your lifestyle and determine when you want to use your pool.

If you wish to swim during the summer and shoulder season only, a small heat pump can be installed, saving on up front costs and ongoing operating costs. However, for all year round swimming, we have the right heat pump too, to ensure you can use your pool at any time of the year.

WARRANTY

For product warranty registration & information on warranty details.

For AU visit: www.astralpool.com.au/warranty

For NZ visit: www.astralpool.co.nz/warranty

R32 GAS HEAT PUMPS

LOWER ENVIRONMENTAL IMPACT

R32 heat pump systems use up to 20% less refrigerant than R410A equivalents, making the Heat Pumps more efficient, which means lower carbon emissions and lower energy costs.

R32 offers higher efficiency and longer pipe runs and requires less refrigerant volume per Kw. This means quicker heating times and less energy used to heat up your pool.

THE KEY THINGS YOU NEED TO KNOW ABOUT R32:

Reduced electricity
consumption
by 10%

Save energy and
speed up heating
time



Efficiently
carries heat

Lower environmental
impact

* R32 Refrigerant only available for ECO and Viron range models

AQUA TEMP

WIFI CONTROL ON THE GO


Monitor and set your pool's temperature even if you're away on a business trip or holiday through your home's WiFi. With the Aqua Temp app (available for Android and iOS devices), your pool temperature will always be right at your fingertips wherever you are!



Aqua Temp



* Wifi capability included in Viron Inverter and Top Discharge Heat Pump range. Available as an optional add-on ECO models.

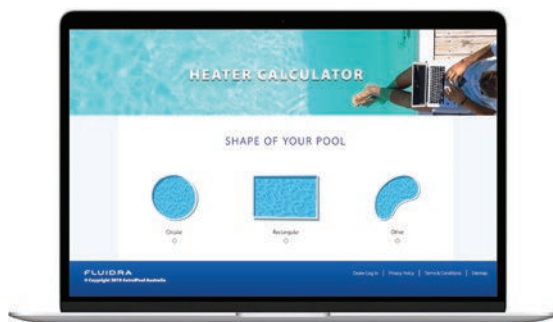

HOW TO SELECT THE BEST HEAT PUMP FOR YOUR NEEDS

Try the Astral Pool “Heat Pump Calculator” on our website at www.astralpool.com.au/support/heat-pump-calculator (or www.astralpool.co.nz/support/heat-pump-calculator for New Zealand customers) and with three simple steps select a suitable Heat pump option available specific to your pool and lifestyle.

Step 1 Select your pool shape and Size

Step 2 Select your pool location to get an average temperature

Step 3 Select your desired water temperature

Along with the “Astral Pool Heat Pump calculator”, use the Heat Pump sizing guide to select the model of Astral Pool Heat Pump to suit your pool and lifestyle.

Alternatively, visit your local Astral Pool dealer for expert advice on the heat pump that suits you.



ECO INVERTER

COMING SOON


Coming soon

| Model | ECO 8kW | ECO 12 kW | ECO 18 kW | |
|---|-----------------------|------------------|------------------|------------|
| Product Code | 78567 | 78668 | 78596 | |
| Operating air temperature (deg.C) | -7°C ~ 43°C | | | |
| Refrigerant | R32 | | | |
| Performance Data | | | | |
| Air 27°C / Water 26°C / Humidity 80% | Heating Capacity (kW) | 2.23-9.32 | 1.97-11.0 | 3.50-18.15 |
| | COP | 14.5-6.23 | 14.4-6.3 | 14.2-6.4 |
| Air 15°C / Water 26°C / Humidity 70% | Heating Capacity (kW) | 1.58-7.24 | 1.79-8.40 | 2.55-13.8 |
| | COP | 6.94-4.9 | 7.03-5.07 | 7.1-5.12 |
| Air 35°C / Water 29°C / Humidity 70% | Cooling Capacity (kW) | 1.37-4.31 | 1.42-4.40 | 3.80-8.13 |
| | COP | 3.29-3.04 | 3.20-2.99 | 3.07-2.76 |
| Technical Data | | | | |
| Power Supply | 220-240V / 50Hz | | | |
| Airflow (m2/hr) | 1600-2700 | 1800-3000 | 2500-4500 | |
| Running Max current (A) | 7.6 | 7.9 | 15.9 | |
| Heating Current at (air 27°C/24.3°C; inlet water 26°C) (A) | 6.55 | 8.35 | 13.84 | |
| Fan Quantity | 1 | 1 | 1 | |
| Fan speed (rpm) | 500-800 | 600-800 | 450-750 | |
| Sound Pressure 1m dBA | 41.2-48.2 | 41.3-52.0 | 42.6-53.3 | |
| Sound Pressure 10m dBA | 21.3-31.5 | 23.9-30.9 | 25.9-36.6 | |
| Water Connections (mm) | 40 | | | |
| Water Flow Volume (m3/hr) | 3.8 | 4.9 | 6 | |
| Minimum water Flow volume (m3/hr) | 2.5 | 3 | 3.5 | |
| Water pressure drop (max) (kPa) | 3 | 4 | 5 | |
| Net Dimensions L/W/H (mm) | 1000 x 418 x 605 | 1000 x 418 x 605 | 1161 x 490 x 861 | |
| Package dimensions (mm) | 1030 x 435 x 615 | 1030 x 435 x 615 | 1210 x 510 x 880 | |
| Net weight (kg) | 45 | 46 | 70 | |
| Gross weight (kg) | 54 | 58 | 85 | |




Viron INVERTER

| Model | | Viron iHP90 | Viron iHP120 | Viron iHP170 | Viron iHP195 | Viron iHP242 | Viron iHP283 |
|--|-----------------------|-----------------|--------------|--------------|--------------|---------------|---------------|
| Product Code | | 78572 | 78573 | 78574 | 78575 | 78576 | 78577 |
| Operating air temperature (deg.C) | | (-15°C-43°C) | | | | | |
| Refrigerant | | R32 | | | | | |
| Performance Data | | | | | | | |
| Air 27°C / Water 26°C / Humidity 80% | Heating Capacity (kW) | 1.7-9 | 2.2-12 | 2.8-17 | 3.3-19.5 | 4.5-24.2 | 5.2-28.3 |
| | COP | 15.1-5.63 | 15.3-5.66 | 15.7-5.63 | 16.1-4.95 | 16-5.04 | 16.3-5.08 |
| Air 15°C / Water 26°C / Humidity 70% | Heating Capacity (kW) | 1.75-7.4 | 2.25-9.7 | 2.92-12.4 | 3.84-15.4 | 4.68-19.9 | 5.46-23.3 |
| | COP | 7-4.63 | 7.03-4.66 | 6.64-4.34 | 6.4-4.04 | 6.5-4.2 | 6.58-4.24 |
| Air 35°C / Water 29°C / Humidity 70% | Cooling Capacity (kW) | 4.28 | 4.6 | 7.65 | 8.62 | 8.88 | 13.35 |
| Technical Data | | | | | | | |
| Power Supply | | 220-240V / 50Hz | | | | | 380V~ / 50Hz |
| Power Phase | | Single phase | | | | | 3 phase |
| Rated Input power (kW) | | 2.15 | 2.555 | 3.312 | 4.29 | 5.96 | 6.87 |
| Rated current (A) | | 9.33 | 13.5 | 14.4 | 18.72 | 9.13 | 11.68 |
| Sound Pressure 1m dBA | | 40-50 | 42-52 | 44-53 | 45-56 | 46-57 | 48-58 |
| Sound Pressure 10m dBA | | 30.67 | 32.57 | 35.49 | 35.59 | 40.59 | 41.59 |
| Water Connections (mm) | | 50 | | | | | |
| Water Flow Volume (m3/hr) | | 54 | 70 | 89 | 110 | 144 | 167 |
| Net Dimensions L/W/H (mm) | | 950×400×620 | 950×400×620 | 1110×480×870 | 1110×480×870 | 1165×470×1275 | 1165×470×1275 |
| Net weight (kg) | | 52 | 58 | 69 | 90 | 90 | 120 |
| Compressor Brand | | Mistubishi | | | | | |



TOP DISCHARGE

| Model | | iHPT127 | iHPT168 | iHPT247 |
|--|-----------------------|-----------------------------|-----------------|-----------------|
| Product Code | | 78560 | 78561 | 78562 |
| Operating air temperature (deg.C) | | -15°C-43°C | | |
| Refrigerant | | R410a | | |
| Performance Data | | | | |
| Air 27°C / Water 26°C / Humidity 80% | Heating Capacity (kW) | 2.8-12.7 | 3.9-16.8 | 5.9-24.6 |
| | COP | 5.77-12.73 | 12.58-5.64 | 12.55-4.98 |
| Air 15°C / Water 26°C / Humidity 70% | Heating Capacity (kW) | 2.7-10.0 | 2.7-11.5 | 4.4-18.1 |
| | COP | 6.2-5.0 | 6.8-5.0 | 7.0-4.8 |
| Air 35°C / Water 29°C / Humidity 70% | Cooling Capacity (kW) | 6.2 | 6.49 | 10 |
| Technical Data | | | | |
| Power Supply | | 220-240 V / 50 Hz - 1 phase | | |
| Fan Quantity | | 1 | 1 | 1 |
| Fan speed (rpm) | | 500-750 | 500-750 | 600-800 |
| Sound Pressure 1m dBA | | 44-54 | 46-56 | 50-60 |
| Sound Pressure 10m dBA | | 24-34 | 26-36 | 30-40 |
| Water Connections (mm) | | 50 | | |
| Water Flow Volume (m3/hr) | | 4.2 | 5.5 | 8.3 |
| Water pressure drop (max) (kPa) | | 4.5 | 4.5 | 6 |
| Net Dimensions L/W/H (mm) | | 723 x 835 x 865 | 723 x 835 x 865 | 770 x 990 x 970 |
| Net weight (kg) | | 63 | 86 | 93 |
| Compressor Brand | | Mistubishi | | |

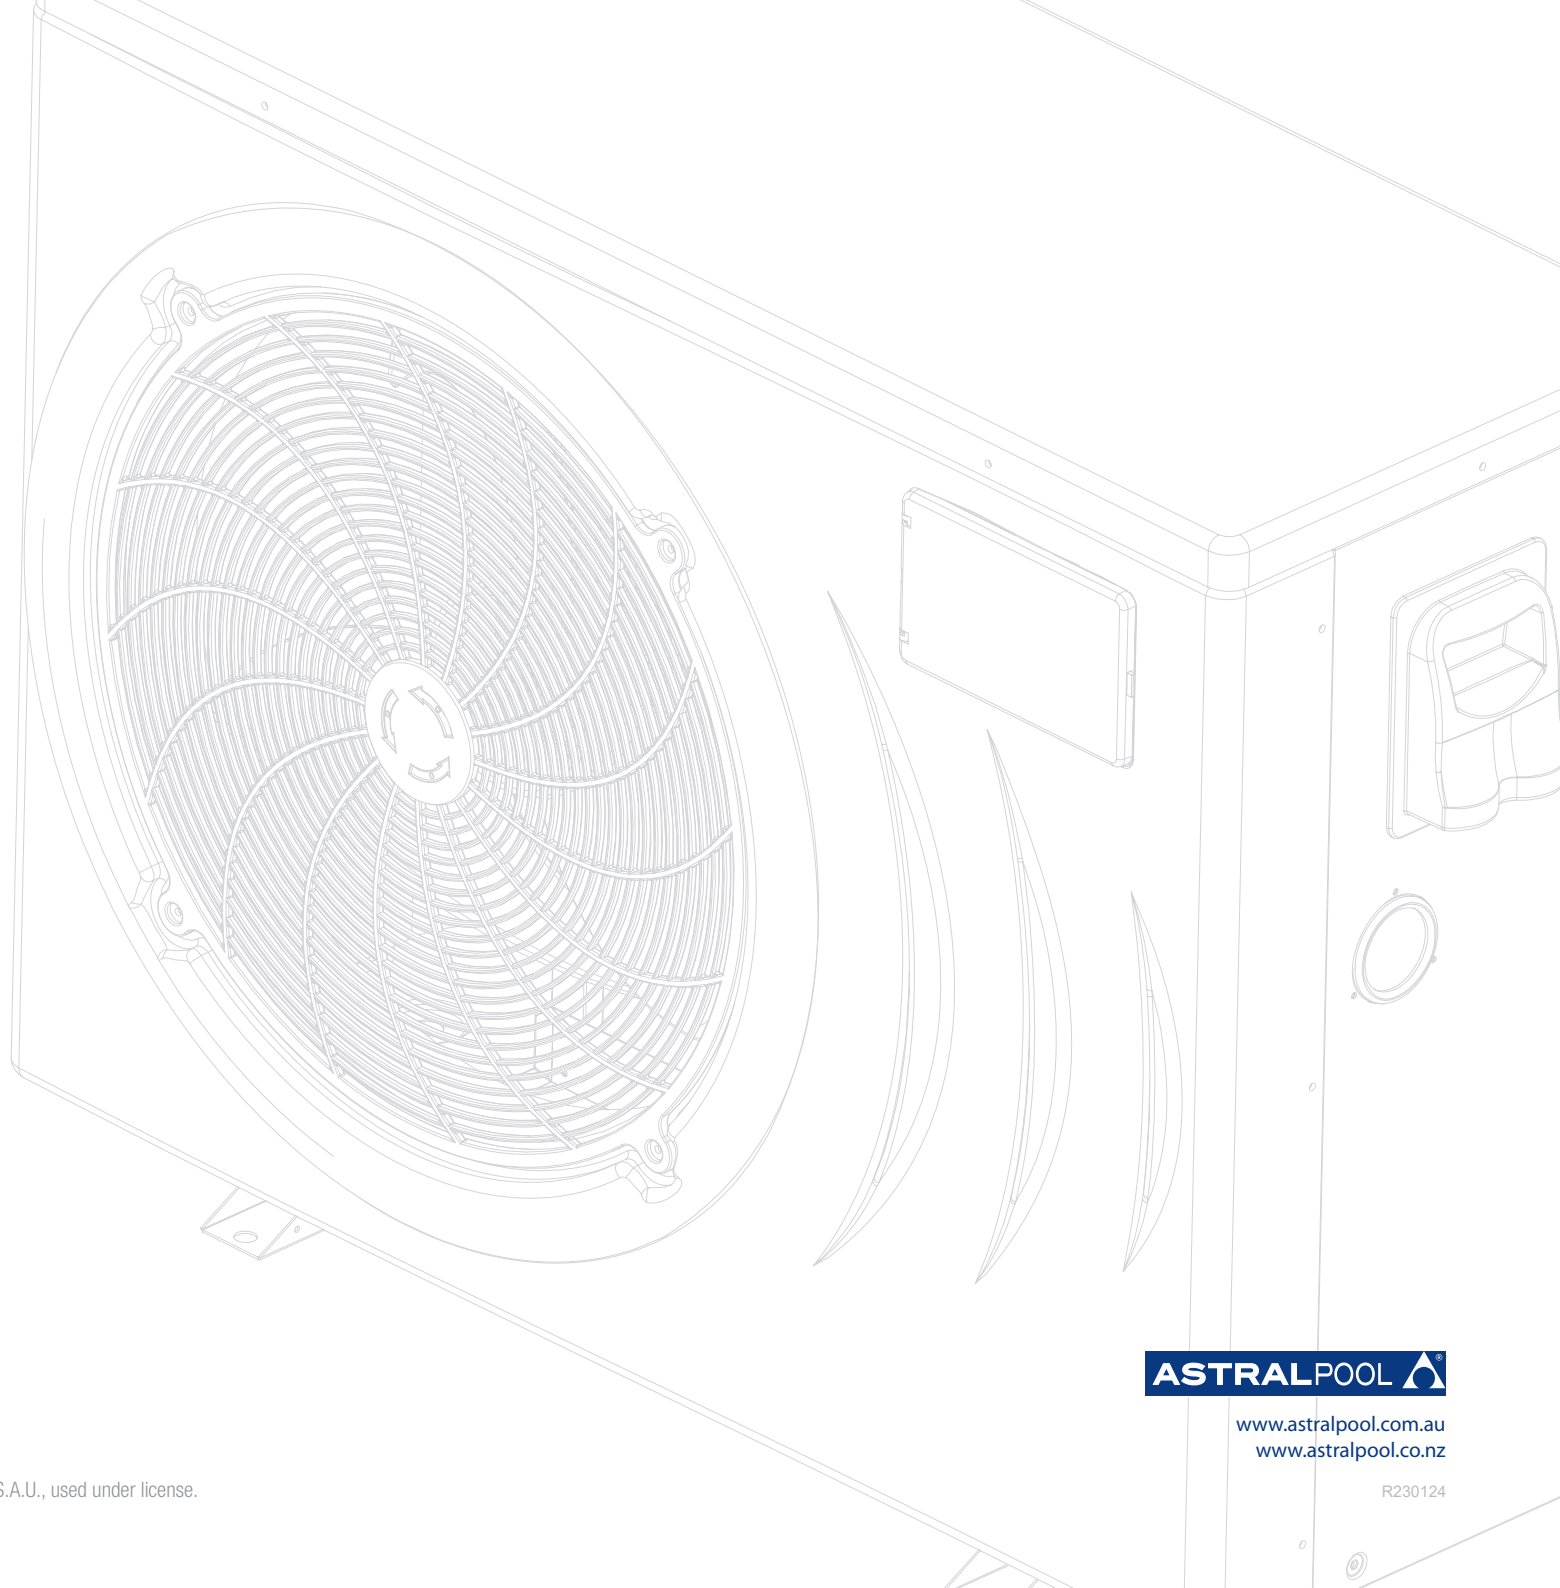

A Fluidra Brand

©2024 ASTRALPOOL® is a registered trademark of FLUIDRA COMMERCIAL, S.A.U., used under license.

ASTRALPOOL 

www.astralpool.com.au
www.astralpool.co.nz

R230124